


999.00 EUR  
 incl. 19% VAT, plus shipping

- Pico-ITX
- SATA
- DDR-II !
- 1 Ghz CPU

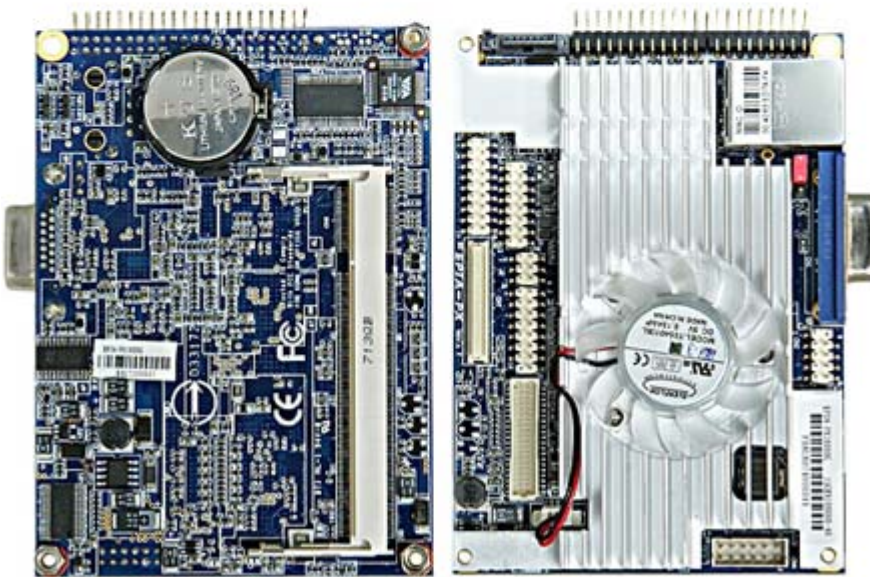

Model	• VIA EPIA PX1000G
Processor	• VIA C7 1.0 GHz - Socket NanoBGA2
Chipset	• VIA VX700 Unified Digital Media IGP Chipset

<b>System Memory</b>	<ul style="list-style-type: none"> <li>• 1 DDR2 533 SODIMM socket</li> </ul> <p>Up to 1GB memory size</p>
<b>VGA</b>	<ul style="list-style-type: none"> <li>• Integrated VIA UniChrome Pro II 3D/2D AGP graphics</li> </ul> <p>with MPEG-2/4 and WMV9 decoding acceleration</p>
<b>Onboard IDE</b>	<ul style="list-style-type: none"> <li>• 1 UltraDMA 133/100/66 connector (2.0mm 44-pin header)</li> </ul>
<b>Onboard Serial ATA</b>	<ul style="list-style-type: none"> <li>• 1 SATA connector</li> </ul>
<b>Onboard LAN</b>	<ul style="list-style-type: none"> <li>• 1 VIA VT6106S 10/100Mbps Ethernet controller</li> </ul> <p>with Power Managemen System</p>
<b>Onboard Audio</b>	<ul style="list-style-type: none"> <li>• VIA VT1708A High Definition Audio Codec</li> </ul>
<b>Internal I/O Connectors</b>	<ul style="list-style-type: none"> <li>• 4 USB pin headers for 4 USB 2.0 ports</li> <li>• 1 COM port connector</li> <li>• 1 PS2 mouse/keyboard pin header</li> <li>• 1 LVDS/DVI connector</li> <li>• 1 Multimedia connector to support external TV-out interface, Video capture port interface and Low pin count interface</li> <li>• 1 Audio pin header for line-out, line-in, mic-in, S/PDIF in, and 7.1 channels audio output</li> <li>• 1 Fan pin header for CPU fan</li> <li>• 1 Pico-ITX power connector</li> </ul>
<b>External I/O Ports</b>	<ul style="list-style-type: none"> <li>• 1 RJ-45 LAN port</li> <li>• 1 VGA port</li> </ul>
<b>BIOS</b>	<ul style="list-style-type: none"> <li>• Award BIOS</li> <li>• 4/8Mbit flash memory</li> </ul>
<b>Management</b>	<ul style="list-style-type: none"> <li>• CPU temperature reading (manufacturing option)</li> <li>• Watch Dog Timer (manufacturing option)</li> <li>• Keyboard-Power-on, Timer-Power-on</li> <li>• Wake-on-LAN</li> <li>• System power management</li> <li>• AC power failure recovery</li> </ul>
<b>Operating Temperature</b>	<ul style="list-style-type: none"> <li>• 0°C – 50°C</li> </ul>
<b>Operating Humidity</b>	<ul style="list-style-type: none"> <li>• 0% ~ 95% (relative humidity; non-condensing)</li> </ul>
<b>Form Factor</b>	<ul style="list-style-type: none"> <li>• Pico-ITX 10 cm x 7.2 cm</li> </ul>